


# Anti-Vibration Pad

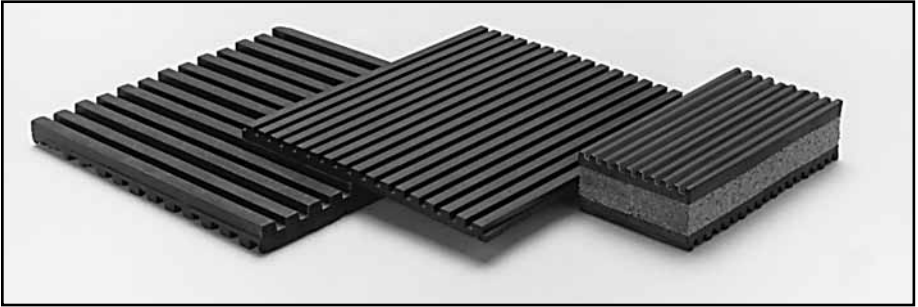

The ribbed configuration of our Neoprene Pads provides firm footing to both floor and equipment, yet they allow mounted equipment to be relocated quickly and easily. Recommended for maximum loads of 50 psi.

Ribbed Nitrile Pads are recommended for loads from 40 to 100 psi.

Neoprene-Cork Pads accept a maximum load of 50 psi.

Natural Frequency approximately 10-15 Hz at maximum load.

## Neoprene (Load Range 20-50 psi)

Part Number	Size (in.)
52347 Ribbed both sides	18 x 18 x 3/8
52348 Ribbed both sides	18 x 36 x 3/8
56780 Ribbed both sides	18 x 18 x 1/2


## Nitrile (Load Range 40-100 psi)

Part Number	Size (in.)
52349 Ribbed both sides	20 x 20 x 3/8
52350 Ribbed one sides	20 x 20 x 1/4

## Neoprene-Cork (Load Range 20-50 psi)

Part Number	Size (in.)
56803 Ribbed both sides	12 x 12 x 1
52337 Ribbed both sides	18 x 18 x 1
56779 Ribbed both sides	18 x 36 x 1

# Compression Pad

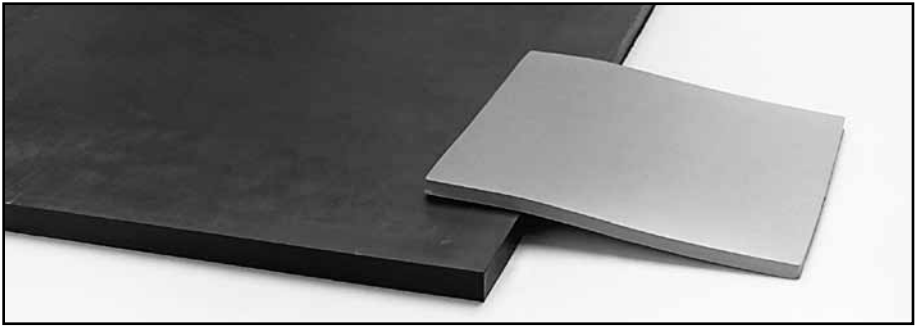

Multi-purpose neoprene isolation pads are used to eliminate vibration and transmitted noise. They offer good physical strength and high energy-absorbing characteristics.

Part Number	Color Code	Size (in.)	Max. Load (psi)
50100	Red	24 x 24 x 1/2	100
52330	Green	24 x 24 x 1/2	200
52331	White	24 x 24 x 1/2	300
52332	Green	12 x 12 x 1/2	200
52333	White	12 x 12 x 1/2	300
52334	Green	12 x 24 x 1/2	200
52335	White	12 x 24 x 1/2	300
52355	Blue-White	36 x 36 x 1/2	300
52746	Black	48 x 48 x 1/2	300