


Fabcel Pad

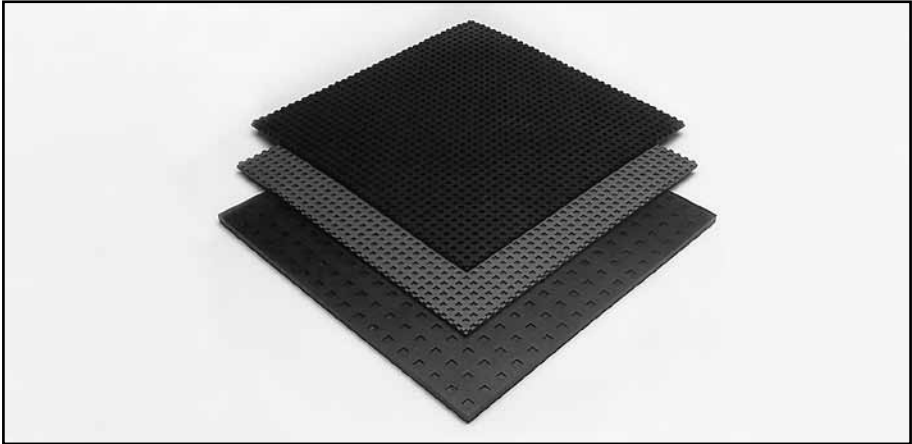

Fabcel vibration isolation pad is manufactured using the same nitrile compound developed in 1962. The properties of the Fabcel pad are designed to provide low frequency vibration isolation and reduction of impact shock.

Fabcel pad has been used for over 40 years for mounting machinery and sensitive equipment where absorption of impact shock or isolation of transmitted vibration is desired. Fabcel pads may be bonded together (“layered”) to achieve the desired isolation efficiency for any application.

Features:

- Fabcel pad can withstand loads up to 300 psi.
- Fabcel pad can have a vertical natural frequency as low as 5.0 Hz and a horizontal natural frequency as low as 3.0 Hz.
- Fabcel pad has a high energy storage rate per unit volume which makes it ideal for certain shock isolation applications.

Part No.	Max. Load (psi)	Size (in.)
Fabcel 25	25	18 x 18 x 5/16
Fabcel 50	50	18 x 18 x 5/16
Fabcel 100	100	18 x 18 x 5/16
Fabcel 200	200	18 x 18 x 1/2
Fabcel 300	300	18 x 18 x 1/2